


WATER TREATMENT SYSTEM

WATER COMMANDER™



| Physical-Chemical and Membrane Hybrid Type

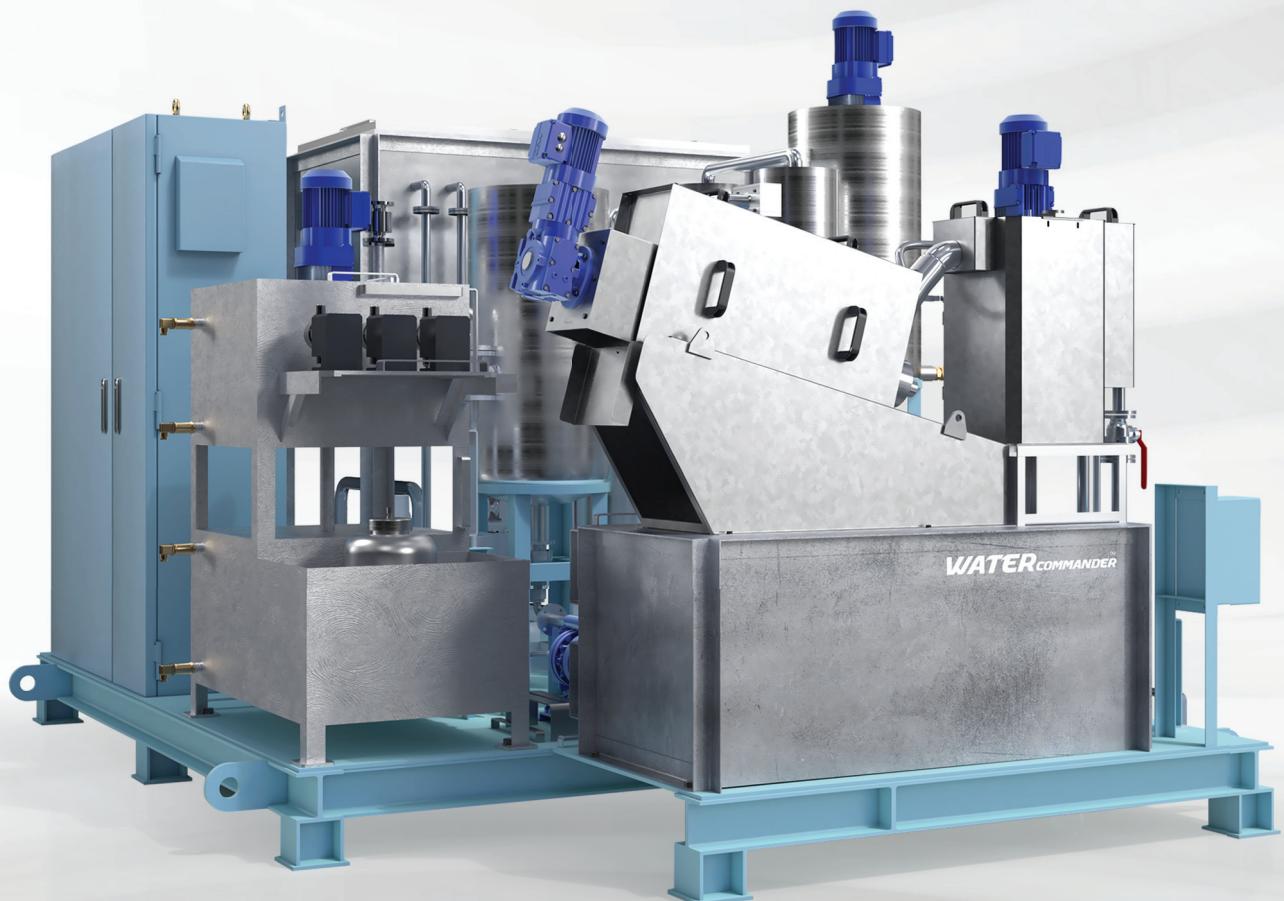

Emergency 상황 발생시
Non-Stop Operating 가능
(Hybrid 방식으로 연속운전 가능)



System 단순화를 통한
Full Automation 구현으로
Easy Operation




Skid화를 통한
설치면적 최소화



상용 Chemical 사용으로
수급 용이

System Configuration

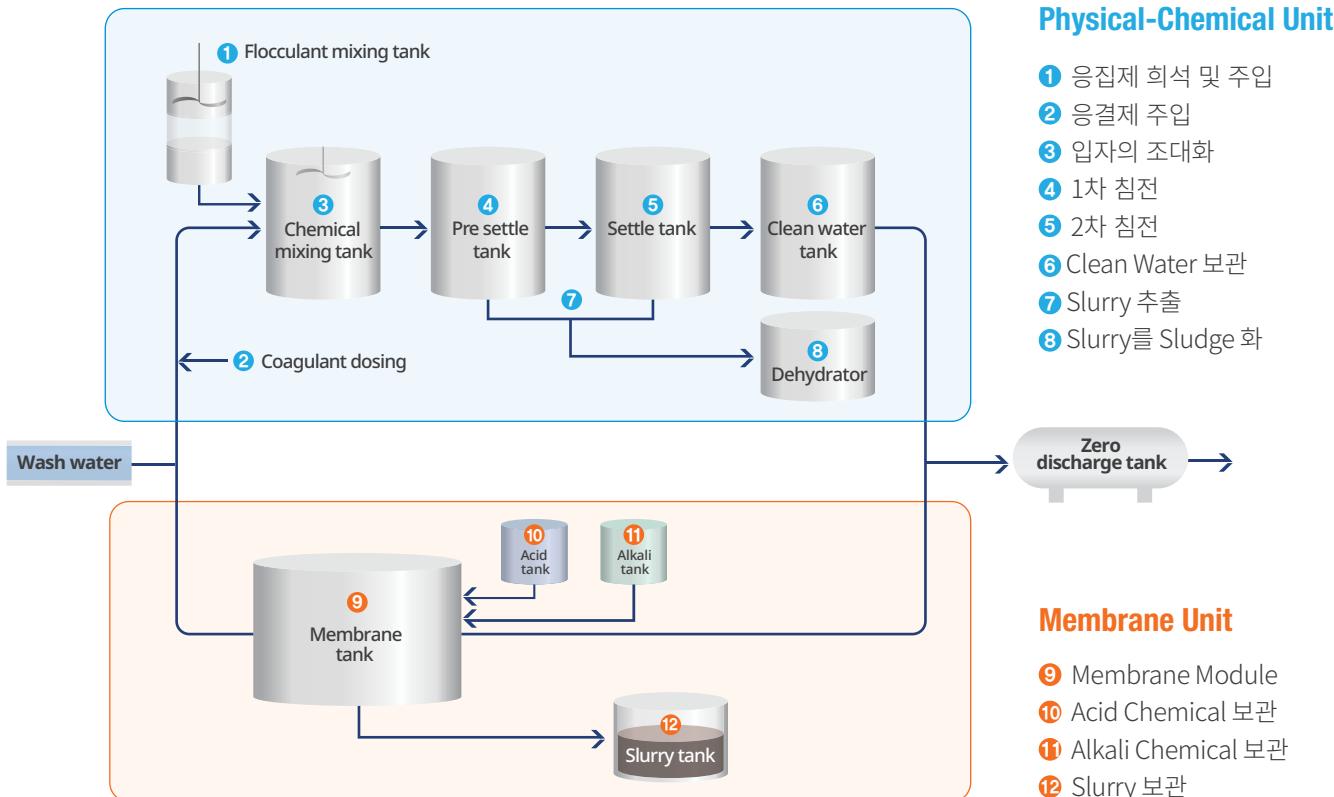

System Lay-out

Scrubber System Capacity : 45MWh

Item	Value	Unit	Remark
Efficiency			
Wash Water Flow	7.4	m ³ /hr	Physical-Chemical Part
Bleed-off	3.7	m ³ /hr	Membrane Part
Slurry Volume	6.8	m ³ /hr	Accumulated Flow Rate
Sludge	0.7	m ³ /hr	Physical-Chemical Part
Sludge	0.1	m ³ /hr	Membrane Part
Typical Consumption data			
Coagulant	10~15	L/hr	
Flocculant	0.15	L/hr	
Comp. Air Pressure	7	Bar	
Dimensions			
Size (LxWxH)	6x4.5x2.5	meter	

